

# Dlr 12W

EM301  
empotrado recessed

1080Lm~1318Lm / 2700K~4000K  
IP20 IP40 / CRI ≥ 90 / 25° 43° 60°

HER  
Light Lovers.



## DESCRIPCIÓN DESCRIPTION

Sobriedad y calidad en el acabado de un downlight de gran rendimiento.

Sobriety and quality in the finish of this downlight with high performance.

## REFERENCIAS REFERENCES

<b>EM301/27</b>	2700K	1080Lm	90Lm/W
<b>EM301/30</b>	3000K	1217Lm	101,4Lm/W
<b>EM301/40</b>	4000K	1318Lm	109,8Lm/W

### GENERAL

negro black blanco white  
customizable custom

empotrado recessed

IP20 IP40 (acces. FL055/FL060)

IK07

### APARATO DE ILUMINACIÓN LIGHTING FIXTURE

25° 43° 60°

IRC ≥ 90 CRI ≥ 90

IP20 IP40 (acces. FL055/FL060)

MacAdam ≤ 3

UGR <19

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 13,2W

power values of the system (LED + driver): 13,2W

### ACCESORIOS ACCESSORIES

FL055 Cristal transparente

FL055 transparent glass

FL060 Cristal glaseado

FL060 frosted glass

### ELÉCTRICA ELECTRICAL

12W

220-240VAC 50/60Hz

equipo incluido

gear included

### MEDIDAS MEASURES

Ø69mm

altura: 87mm

height: 87mm

### REGULACIÓN DIMMING

on / off

corte de fase IGBT/TRIAC

phase-cut dimming IGBT/TRIAC

1-10V

pulsador

push

DALI

### RECORTE CUTOUT

Ø60mm

min. espesor del techo: 13mm


min. ceiling thickness: 13mm

máx. espesor del techo: 22mm

max. ceiling thickness: 22mm

profundidad empotrada: 92mm

recessed depth: 92mm

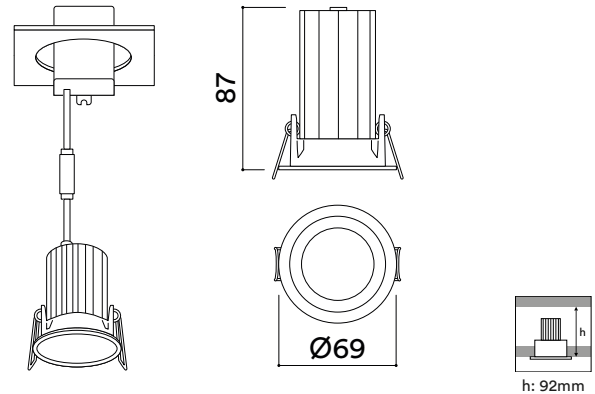

H(m)	D(cm)	Lux
1	45	4037
2	90	1009
3	135	449

3000K 25°

H(m)	D(cm)	Lux
1	69	2969
2	138	742
3	207	330

3000K 43°

H(m)	D(cm)	Lux
1	97	2090
2	193	523
3	290	232

3000K 60°



cambio sin previo aviso change without notice

# Dlr 9W

EM300  
empotrado recessed

683Lm~870Lm / 2700K~4000K  
IP20 IP40 / CRI ≥ 90 / 20° 40° 60°

HER  
Light Lovers.



## DESCRIPCIÓN DESCRIPTION

Sobriedad y calidad en el acabado de un downlight de gran rendimiento.

Sobriety and quality in the finish of this downlight with high performance.

## REFERENCIAS REFERENCES

EM300/27	2700K	683Lm	75,9Lm/W
EM300/30	3000K	779Lm	86,6Lm/W
EM300/40	4000K	870Lm	96,7Lm/W

### GENERAL

negro black blanco white  
customizable custom

empotrado recessed

IP20 IP40 (acces. FL055/FL060)

IK07

### APARATO DE ILUMINACIÓN LIGHTING FIXTURE

20° 40° 60°

IRC ≥ 90 CRI ≥ 90

IP20 IP40 (acces. FL055/FL060)

MacAdam ≤ 3

UGR <19

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 9,9W

power values of the system (LED + driver): 9,9W

### ACCESORIOS ACCESSORIES

FL055 Cristal transparente

FL055 transparent glass

FL060 Cristal glaseado

FL060 frosted glass

### ELÉCTRICA ELECTRICAL

9W

220-240VAC 50/60Hz

equipo incluido

gear included

### MEDIDAS MEASURES

Ø69mm

altura: 80mm

height: 80mm

### REGULACIÓN DIMMING

on / off

corte de fase IGBT/TRIAC

phase-cut dimming IGBT/TRIAC

1-10V

pulsador

push

DALI

### RECORTE CUTOUT

Ø60mm

min. espesor del techo: 13mm





min. ceiling thickness: 13mm

máx. espesor del techo: 22mm

max. ceiling thickness: 22mm

profundidad empotrada: 85mm

recessed depth: 85mm

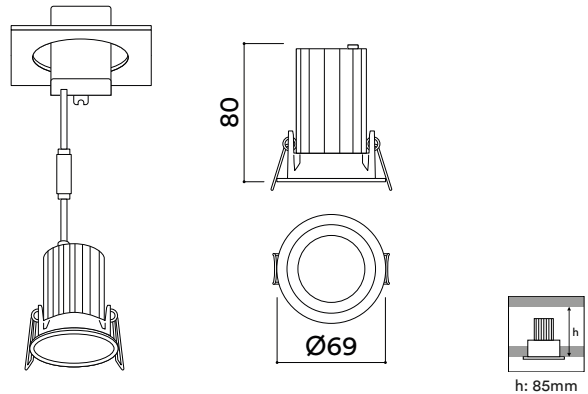

cambio sin previo aviso change without notice