

Straight Plate On Triple 3x9W

3x683Lm~3x870Lm / 2700K~4000K
IP20 / CRI ≥ 90 / 20° 40° 60°

HER
Light Lovers.

2226
superficie surface



DESCRIPCIÓN DESCRIPTION

Versión triple de la gama STRAIGHT PLATE.

Triple lamp in the STRAIGHT PLATE range.

REFERENCIAS REFERENCES

Model	Color Temperature	Beam Diameter	Lumen Output
2226/27	2700K	3x683Lm	227,7Lm/W
2226/30	3000K	3x779Lm	259,7Lm/W
2226/40	4000K	3x870Lm	290Lm/W

GENERAL

negro black blanco white
customizable custom

superficie surface

IP20

IK02

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

20° 40° 60°

IRC ≥ 90 CRI ≥ 90

IP20

MacAdam ≤ 3

UGR N/A

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 3x9,9W

power values of the system (LED + driver): 3x9,9W

ACCESORIOS ACCESSORIES

FL040 Panel de abeja

FL040 honeycomb diffuser

FL055 Cristal transparente

FL055 transparent glass

FL060 Cristal glaseado

FL060 frosted glass

ELÉCTRICA ELECTRICAL

3x9W

220-240VAC 50/60Hz

equipo integrado

integrated gear

MEDIDAS MEASURES

325mm x 85mm

altura: 120mm

height: 120mm

REGULACIÓN DIMMING

on / off

corte de fase IGBT/TRIAC

phase-cut dimming IGBT/TRIAC

1-10V

pulsador


push

DALI

INSTALACIÓN INSTALLATION

superficie

surface

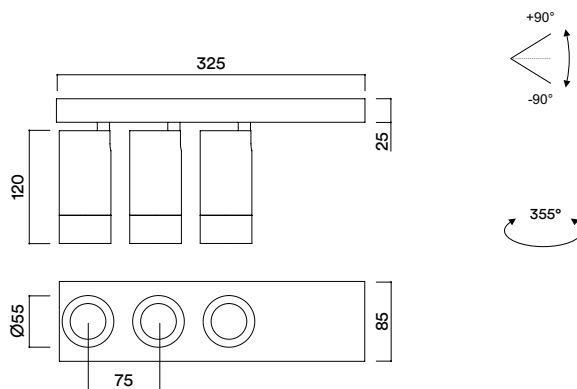

H(m)	D(cm)	Lux
1	41	8130
2	83	2033
3	124	903

3000K 20°

H(m)	D(cm)	Lux
1	74	4208
2	147	1052
3	221	468

3000K 40°

H(m)	D(cm)	Lux
1	121	2816
2	242	704
3	363	313

3000K 60°



cambio sin previo aviso change without notice

Straight Plate On Triple 3x12W

3x1080Lm~3x1318Lm / 2700K~4000K

IP20 / CRI ≥ 90 / 25° 43° 60°

HER
Light Lovers.

2226
superficie surface



DESCRIPCIÓN DESCRIPTION

Versión triple de la gama STRAIGHT PLATE.

Triple lamp in the STRAIGHT PLATE range.

REFERENCIAS REFERENCES

Model	Color Temperature	Beam Spread	Lumen Output
2226/27	2700K	3x1080Lm	270Lm/W
2226/30	3000K	3x1217Lm	304,3Lm/W
2226/40	4000K	3x1318Lm	329,5Lm/W

GENERAL

negro black blanco white
customizable custom

superficie surface

IP20

IK02

ELÉCTRICA ELECTRICAL

3x12W

220-240VAC 50/60Hz

equipo integrado

integrated gear

MEDIDAS MEASURES

325mm x 85mm

altura: 120mm

height: 120mm

REGULACIÓN DIMMING

on / off

corte de fase IGBT/TRIAC

phase-cut dimming IGBT/TRIAC

1-10V

pulsador

push

DALI

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

25° 43° 60°

IRC ≥ 90 CRI ≥ 90

IP20

MacAdam ≤ 3

UGR N/A

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 3x13,2W

power values of the system (LED + driver): 3x13,2W

ACCESORIOS ACCESSORIES

FL040 Panel de abeja

FL040 honeycomb diffuser

FL055 Cristal transparente

FL055 transparent glass


FL060 Cristal glaseado

FL060 frosted glass

INSTALACIÓN INSTALLATION

superficie

surface

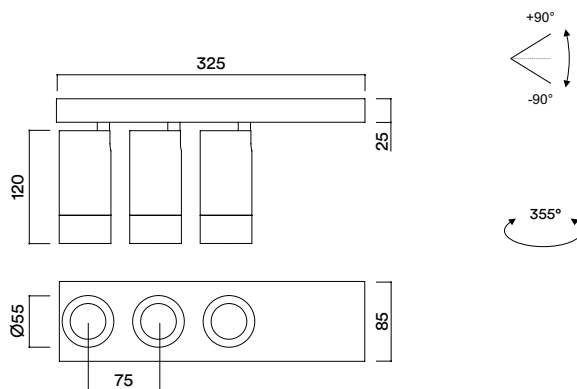

H(m)	D(cm)	Lux
1	45°	12112
2	90	3028
3	135	1346

3000K 25°

H(m)	D(cm)	Lux
1	69	8906
2	138	2227
3	207	990

3000K 43°

H(m)	D(cm)	Lux
1	97	6270
2	193	1568
3	290	697

3000K 60°



cambio sin previo aviso change without notice