



DESCRIPCIÓN DESCRIPTION

Downlight estanco sin renunciar a la calidad lumínica.

Waterproof downlight without giving quality up.

REFERENCIAS REFERENCES

Modelo	Temperatura de Color	Luminosidad (Lm)	Eficiencia (Lm/W)
LM088/27	2700K	1080Lm	90Lm/W
LM088/30	3000K	1217Lm	101,4Lm/W
LM088/40	4000K	1318Lm	109,8Lm/W

GENERAL

negro black blanco white

empotrado recessed

IP65

IK02

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

25° 43° 60°

IRC ≥ 90 CRI ≥ 90

IP65

MacAdam ≤ 3

UGR <19

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 13,2W

power values of the system (LED + driver): 13,2W

ACCESORIOS ACCESSORIES

FL040 Panel de abeja

FL040 honeycomb diffuser

ELÉCTRICA ELECTRICAL

12W

220-240VAC 50/60Hz

equipo incluido

gear included

MEDIDAS MEASURES

Ø85mm

altura: 114mm

height: 114mm

REGULACIÓN DIMMING

on / off

corte de fase IGBT/TRIAC

phase-cut dimming IGBT/TRIAC

1-10V

pulsador

push

DALI

RECORTE CUTOUT

Ø70mm

mín. espesor del techo: 13mm





min. ceiling thickness: 13mm

máx. espesor del techo: 35mm

max. ceiling thickness: 35mm

profundidad empotrada: 119mm

recessed depth: 119mm

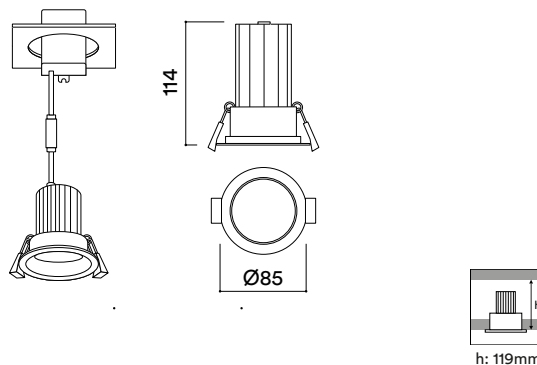

cambio sin previo aviso change without notice



DESCRIPCIÓN DESCRIPTION

Downlight estanco sin renunciar a la calidad lumínica.

Waterproof downlight without giving quality up.

REFERENCIAS REFERENCES

Model	Color Temperature	Lumen	Efficiency
LM080/27	2700K	683Lm	75,9Lm/W
LM080/30	3000K	779Lm	86,6Lm/W
LM080/40	4000K	870Lm	96,7Lm/W

GENERAL

negro black blanco white

empotrado recessed

IP65

IK02

ELÉCTRICA ELECTRICAL

9W

220-240VAC 50/60Hz

equipo incluido

gear included

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

20° 40° 60°

IRC ≥ 90 CRI ≥ 90

IP65

MacAdam ≤ 3

UGR <19

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 9,9W

power values of the system (LED + driver): 9,9W

MEDIDAS MEASURES

Ø85mm

altura: 86mm

height: 86mm

REGULACIÓN DIMMING

on / off

corte de fase IGBT/TRIAC

phase-cut dimming IGBT/TRIAC

1-10V

pulsador

push

DALI

ACCESORIOS ACCESSORIES

FL040 Panel de abeja

FL040 honeycomb diffuser

RECORTE CUTOUT

Ø70mm

min. espesor del techo: 13mm





min. ceiling thickness: 13mm

máx. espesor del techo: 35mm

max. ceiling thickness: 35mm

profundidad empotrada: 91mm

recessed depth: 91mm

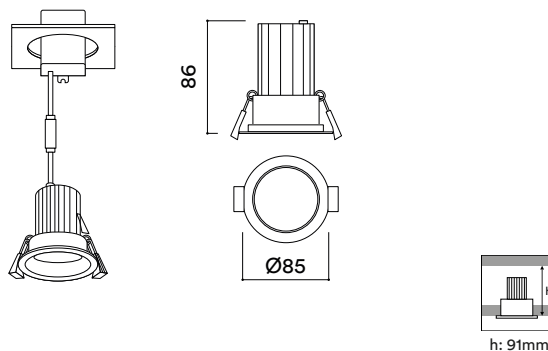

cambio sin previo aviso change without notice