

Straight XL Base

2x1080Lm~2x1318Lm / 2700K~4000K

IP20 / CRI ≥ 90 / 25° 43° 60°

HER

Light Lovers.

2x12W

2229

superficie surface



DESCRIPCIÓN DESCRIPTION

Proyector de base de excelente acabado y confort visual.

Base projector with excellent visual comfort and finish.

REFERENCIAS REFERENCES

2229/27	2700K	2x1080Lm	180Lm/W
2229/30	3000K	2x1217Lm	202,8Lm/W
2229/40	4000K	2x1318Lm	219,7Lm/W

GENERAL

negro black blanco white
customizable custom

superficie surface

IP20

IK02

ELÉCTRICA ELECTRICAL

2x12W

220-240VAC 50/60Hz

equipo integrado

integrated gear

MEDIDAS MEASURES

Ø55mm x 150mm

REGULACIÓN DIMMING

on / off

corte de fase IGBT/TRIAC

phase-cut dimming IGBT/TRIAC

INSTALACIÓN INSTALLATION

superficie

surface

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

25° 43° 60°

IRC ≥ 90 CRI ≥ 90

IP20

MacAdam ≤ 3

UGR N/A

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 2x13,2W

power values of the system (LED + driver): 2x13,2W

ACCESORIOS ACCESSORIES

FL040 Panel de abeja


FL040 honeycomb diffuser

FL055 Cristal transparente

FL055 transparent glass

FL060 Cristal glaseado

FL060 frosted glass

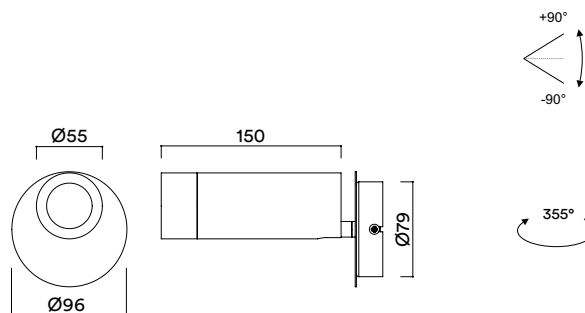

H(m)	D(cm)	Lux
1	45°	4037
2	90	1009
3	135	449


3000K 25°

H(m)	D(cm)	Lux
1	69°	2969
2	138	742
3	207	330

3000K 43°

H(m)	D(cm)	Lux
1	97°	2090
2	193	523
3	290	85

3000K 60°



cambio sin previo aviso change without notice

Straight XL Base

2x9W

2229
superficie surface

2x683Lm~2x870Lm / 2700K~4000K

IP20 / CRI ≥ 90 / 20° 40° 60°

HER
Light Lovers.



DESCRIPCIÓN DESCRIPTION

Proyector de base de excelente acabado y confort visual.

Base projector with excellent visual comfort and finish.

REFERENCIAS REFERENCES

2229/27	2700K	2x683Lm	151,8Lm/W
2229/30	3000K	2x779Lm	173,1Lm/W
2229/40	4000K	2x870Lm	193,3Lm/W

GENERAL

negro black blanco white
customizable custom

superficie surface

IP20

IK02

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

20° 40° 60°

IRC ≥ 90 CRI ≥ 90

IP20

MacAdam ≤ 3

UGR N/A

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 2x9,9W

power values of the system (LED + driver): 2x9,9W

ACCESORIOS ACCESSORIES

FL040 Panel de abeja

FL040 honeycomb diffuser

FL055 Cristal transparente

FL055 transparent glass

FL060 Cristal glaseado

FL060 frosted glass

ELÉCTRICA ELECTRICAL

2x9W

220-240VAC 50/60Hz

equipo integrado

integrated gear

MEDIDAS MEASURES

Ø55mm x 150mm

REGULACIÓN DIMMING

on / off


corte de fase IGBT/TRIAC

phase-cut dimming IGBT/TRIAC

INSTALACIÓN INSTALLATION

superficie

surface

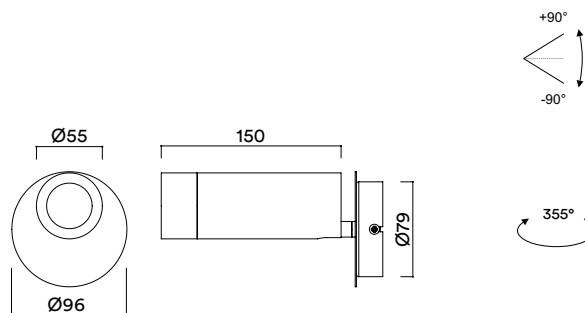

H(m)	D(cm)	Lux
1	41	2710
2	83	678
3	124	301

3000K 20°

H(m)	D(cm)	Lux
1	74	1403
2	147	351
3	221	64

3000K 40°

H(m)	D(cm)	Lux
1	121	939
2	242	235
3	363	104

3000K 60°



cambio sin previo aviso change without notice