



DESCRIPCIÓN DESCRIPTION

PUK es un punto de luz de haz cerrado y alta eficiencia lumínica de fácil instalación con un resultado estético sorprendente.

Round recessed downlight. This is a light point of closed beam and high luminic efficiency with a surprising aesthetic result.

REFERENCIAS REFERENCES

EM603/27	2700K	320Lm	45,7Lm/W
EM603/30	3000K	320Lm	45,7Lm/W

GENERAL

negro black blanco white

empotrado recessed

IP40

IK07

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

15°

IRC ≥ 90 CRI ≥ 90

IP40

MacAdam ≤ 3

UGR <19

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 7,7W

power values of the system (LED + driver): 7,7W

ACCESORIOS ACCESSORIES

no disponible

not available

ELÉCTRICA ELECTRICAL

7W

220-240VAC 50/60Hz

equipo incluido

gear included

MEDIDAS MEASURES

Ø60mm

altura: 54mm

height: 54mm

REGULACIÓN DIMMING

on / off

corte de fase IGBT/TRIAC

phase-cut dimming IGBT/TRIAC

1-10V

pulsador

push

DALI

RECORTE CUTOUT

Ø50mm

min. espesor del techo: 13mm


min. ceiling thickness: 13mm

máx. espesor del techo: 43mm

max. ceiling thickness: 43mm

profundidad empotrada: 59mm

recessed depth: 59mm

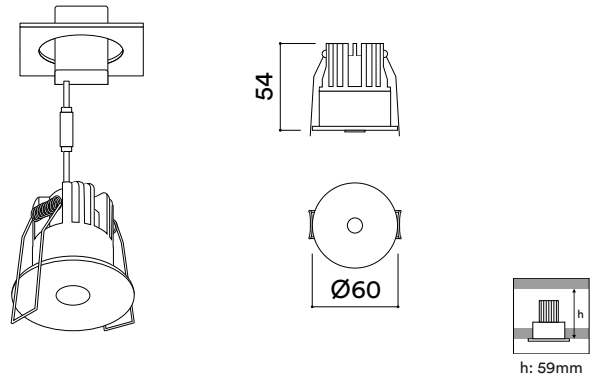

H(m)	D(cm)	Lux
1	26	3457
2	51	864
3	77	384

2700K 15°



cambio sin previo aviso change without notice