

Slim 111 15W

EM210
empotrado recessed

750Lm / 2800K
IP20 / CRI \geq 85 / 8° 20° 45°

HER
Light Lovers.



GENERAL

negro black blanco white

empotrado recessed

IP20

ángulo de inclinación +30° -30°

tilting angle: +30° -30°

IK02

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

8° 20° 45°

IRC \geq 85 CRI \geq 85

IP20

MacAdam \leq 3

UGR N/A

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 16,5W

power values of the system (LED + driver): 16,5W

ACCESORIOS ACCESSORIES

no disponible

not available

ELÉCTRICA ELECTRICAL

15W

220-240VAC 50/60Hz

equipo incluido

gear included

MEDIDAS MEASURES

183mm x 183mm

altura: 70,5mm

height: 70,5mm

REGULACIÓN DIMMING

on / off

corte de fase IGBT/TRIAC (consult.)

phase-cut dimming IGBT/TRIAC

1-10V (consult.)

pulsador (consult.)

push

DALI (consult.)

RECORTE CUTOUT

165 x 165mm

mín. espesor del techo: 13mm

min. ceiling thickness: 13mm

máx. espesor del techo: 26mm

max. ceiling thickness: 26mm

profundidad empotrada: 76mm

recessed depth: 76mm


DESCRIPCIÓN DESCRIPTION

Gama SLIM 111 para lámpara AR111.

SLIM 111 range for AR111 lamps.

REFERENCIAS REFERENCES

EM210 2800K 750Lm 50Lm/W

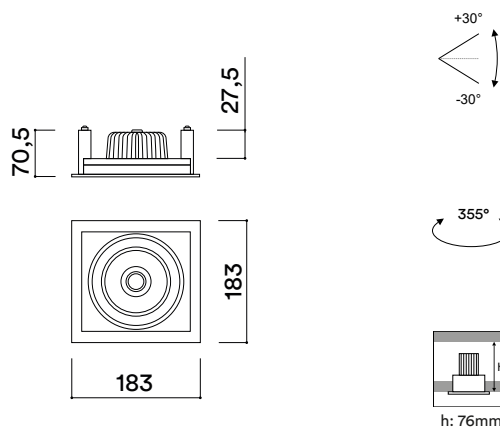

H(m)	D(cm)	Lux
1	22	13003
2	44	3251
3	66	1445

2800K 8°

H(m)	D(cm)	Lux
1	39	4680
2	78	1170
3	117	520

2800K 20°



cambio sin previo aviso change without notice