

Nit Updown Wall

2x1450Lm~2x1470Lm / 2700K~4000K


IP41 / CRI ≥ 80 / 120°

HER

Light Lovers.

2x18W

E2A
estructure structure

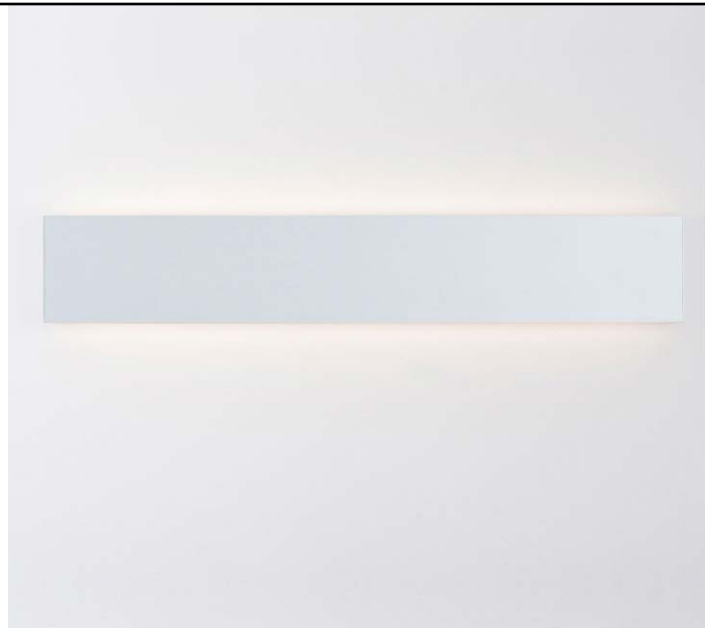

DESCRIPCIÓN DESCRIPTION

Luminaria de luz directa e indirecta para instalación en pared.

Wall light with a direct-indirect lighting.

REFERENCIAS REFERENCES

E2A/27	2700K	2x1450Lm	161,1Lm/W
E2A/30	3000K	2x1370Lm	152,2Lm/W
E2A/40	4000K	2x1470Lm	163,3Lm/W

GENERAL

negro black blanco white
customizable custom

estructure structure

IP41

IK33

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

120°

IRC ≥ 80 CRI ≥ 80

IP41

MacAdam ≤ 4

UGR N/D

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 2x18W

power values of the system (LED + driver): 2x18W

ACCESORIOS ACCESSORIES

B6 Kit de emergencia 1h

B6 emergency kit 1h

ELÉCTRICA ELECTRICAL

2x18W

220-240VAC 50/60Hz

equipo integrado

integrated gear

MEDIDAS MEASURES

610mm x 43,8mm

altura: 102mm

height: 102mm

REGULACIÓN DIMMING

on / off

1-10V (consult.)

pulsador


push

DALI

INSTALACIÓN INSTALLATION

superficie (pared)

surface (wall)

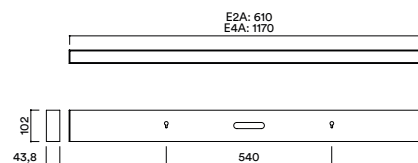

H(m)	D(cm)	Lux
3	805	58
2	537	130
1	268	520

3000K 120°

H(m)	D(cm)	Lux
1	268	520
2	537	130
3	805	58

3000K 120°



cambio sin previo aviso change without notice

Nit Updown Wall

2x35W

E4A
estructure structure

2x2905Lm / 2700K
IP42 / CRI ≥ 80 / 120°

HER
Light Lovers.



DESCRIPCIÓN DESCRIPTION

Luminaria de luz directa e indirecta para instalación en pared.

Wall light with a direct-indirect lighting.

REFERENCIAS REFERENCES

E4A 2700K 2x2905Lm 166Lm/W

GENERAL

negro black blanco white
customizable custom

estructure structure

IP42

IK34

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

120°

IRC ≥ 80 CRI ≥ 80

IP42

MacAdam ≤ 5

UGR N/D

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 2x35W

power values of the system (LED + driver): 2x35W

ACCESORIOS ACCESSORIES

B6 Kit de emergencia 1h

B6 emergency kit 1h

ELÉCTRICA ELECTRICAL

2x35W

220-240VAC 50/60Hz

equipo integrado

integrated gear

MEDIDAS MEASURES

1170mm x 43,8mm

altura: 102mm

height: 102mm

REGULACIÓN DIMMING

on / off

1-10V (consult.)

pulsador


push

DALI

INSTALACIÓN INSTALLATION

superficie (pared)

surface (wall)

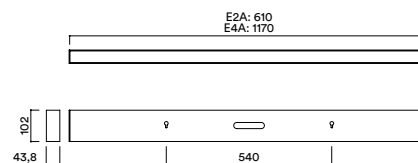

H(m)	D(cm)	Lux
3	805	115
2	537	260
1	268	1039

3000K 120°

H(m)	D(cm)	Lux
1	268	1039
2	537	260
3	805	115

3000K 120°



cambio sin previo aviso change without notice

Nit Updown Wall

2x2735Lm~2x2940Lm / 3000K~4000K


IP42 / CRI ≥ 80 / 120°

HER

Light Lovers.

2x36W

E4A
estructure structure

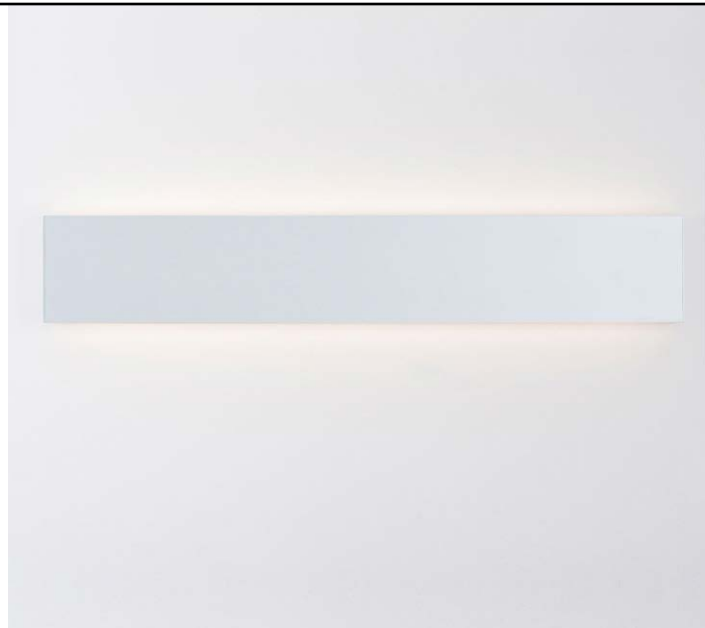

DESCRIPCIÓN DESCRIPTION

Luminaria de luz directa e indirecta para instalación en pared.

Wall light with a direct-indirect lighting.

REFERENCIAS REFERENCES

E4A/30	3000K	2x2735Lm	151,9Lm/W
E4A/40	4000K	2x2940Lm	163,3Lm/W

GENERAL

negro black blanco white
customizable custom

estructure structure

IP42

IK34

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

120°

IRC ≥ 80 CRI ≥ 80

IP42

MacAdam ≤ 5

UGR N/D

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 2x35W

power values of the system (LED + driver): 2x35W

ACCESORIOS ACCESSORIES

B6 Kit de emergencia 1h

B6 emergency kit 1h

ELÉCTRICA ELECTRICAL

2x36W

220-240VAC 50/60Hz

equipo integrado

integrated gear

MEDIDAS MEASURES

1170mm x 43,8mm

altura: 102mm

height: 102mm

REGULACIÓN DIMMING

on / off

1-10V (consult.)

pulsador


push

DALI

INSTALACIÓN INSTALLATION

superficie (pared)

surface (wall)

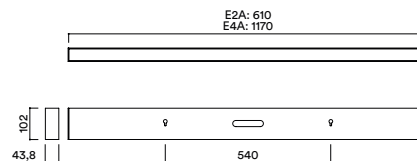

H(m)	D(cm)	Lux
3	805	115
2	537	260
1	268	1039

3000K 120°

H(m)	D(cm)	Lux
1	268	1039
2	537	260
3	805	115

3000K 120°



cambio sin previo aviso change without notice