

# Trim 75 41W

EM271  
empotrado recessed

3906Lm~4560Lm / 2700K~4000K  
IP20 IP40 / CRI ≥ 90 / 15° 24° 40° 55°

**HER**  
Light Lovers.



## GENERAL

negro black blanco white  
customizable custom

empotrado recessed

IP20 IP40 (acces. FL055/FL060)

ángulo de inclinación +30° -30°

tilting angle: +30° -30°

IK07

## APARATO DE ILUMINACIÓN LIGHTING FIXTURE

15° 24° 40° 55°

IRC ≥ 90 CRI ≥ 90

IP20 IP40 (acces. FL055/FL060)

MacAdam ≤ 3

UGR N/A

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 41W

power values of the system (LED + driver): 41W

## ACCESORIOS ACCESSORIES

FL025 Filtro escultura 25°-37°

FL060 sculpture filter 25°-37°

FL030 Filtro escultura 21°-30°

FL060 sculpture filter 21°-30°

FL035 Panel de abeja

FL035 honeycomb diffuser

FL045 Cristal transparente

FL060 frosted glass

FL050 Cristal glaseado

FL050 transparent glass

## ELÉCTRICA ELECTRICAL

41W

220-240VAC 50/60Hz

equipo incluido

gear included

## MEDIDAS MEASURES

178mm x 118mm

altura: 149mm

height: 149mm

## REGULACIÓN DIMMING

on / off

1-10V

pulsador

push

DALI

## RECORTE CUTOUT

120 x 120mm

min. espesor del techo: 13mm

min. ceiling thickness: 13mm

máx. espesor del techo: -

max. ceiling thickness: -

profundidad empotrada: 154mm

recessed depth: 154mm






## DESCRIPCIÓN DESCRIPTION

Gama trimless del modelo SLIM 75. De fácil acceso al módulo LED.

Trimless version of the SLIM 75 range with an easy access to the lamp.

## REFERENCIAS REFERENCES

REFERENCIA	TEMPERATURA DE COLOR	FLUJO LUMINOSO	EFICIENCIA
EM271/27	2700K	3906Lm	95,3Lm/W
EM271/30	3000K	4240Lm	103,4Lm/W
EM271/40	4000K	4560Lm	111,2Lm/W

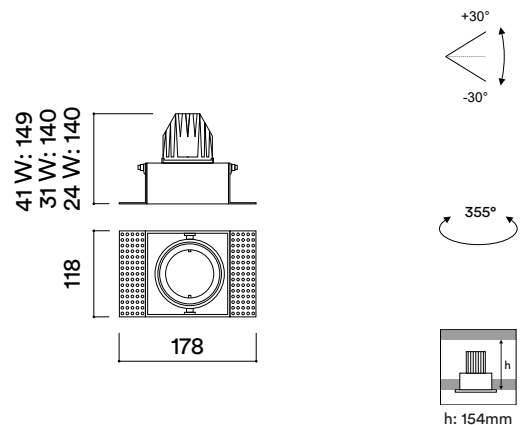

cambio sin previo aviso change without notice

# Trim 75 31W

EM120  
empotrado recessed

2914Lm~3381Lm / 2700K~4000K  
IP20 IP40 / CRI ≥ 90 / 17° 24° 40° 60°

HER  
Light Lovers.



## GENERAL

negro black blanco white  
customizable custom

empotrado recessed

IP20 IP40 (acces. FL055/FL060)

ángulo de inclinación +30° -30°

tilting angle: +30° -30°

IK07

## APARATO DE ILUMINACIÓN LIGHTING FIXTURE

17° 24° 40° 60°

IRC ≥ 90 CRI ≥ 90

IP20 IP40 (acces. FL055/FL060)

MacAdam ≤ 3

UGR N/A

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 34,1W

power values of the system (LED + driver): 34,1W

## ACCESORIOS ACCESSORIES

FL025 Filtro escultura 25°-37°

FL060 sculpture filter 25°-37°

FL030 Filtro escultura 21°-30°

FL060 sculpture filter 21°-30°

FL035 Panel de abeja

FL035 honeycomb diffuser

FL045 Cristal transparente

FL060 frosted glass

FL050 Cristal glaseado

FL050 transparent glass

## ELÉCTRICA ELECTRICAL

31W

220-240VAC 50/60Hz

equipo incluido

gear included

## MEDIDAS MEASURES

178mm x 118mm

altura: 140mm

height: 140mm

## REGULACIÓN DIMMING

on / off

1-10V

pulsador

push

DALI

## RECORTE CUTOUT

120 x 120mm

min. espesor del techo: 13mm

min. ceiling thickness: 13mm

máx. espesor del techo: -

max. ceiling thickness: -

profundidad empotrada: 145mm

recessed depth: 145mm


## DESCRIPCIÓN DESCRIPTION

Gama trimless del modelo SLIM 75. De fácil acceso al módulo LED.

Trimless version of the SLIM 75 range with an easy access to the lamp.

## REFERENCIAS REFERENCES

Model	Color	Lumen	lm/W
EM120/27	2700K	2914Lm	94Lm/W
EM120/30	3000K	3142Lm	101,4Lm/W
EM120/40	4000K	3381Lm	109,1Lm/W

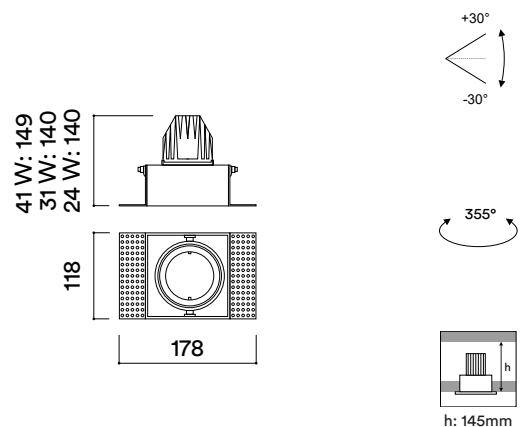

H(m)	D(cm)	Lux	H(m)	D(cm)	Lux
1	27	22848	1	35	17382
2	55	5712	2	71	4346
3	82	2539	3	106	1931
3000K 17°			3000K 24°		
H(m)	D(cm)	Lux	H(m)	D(cm)	Lux
1	76	6126	1	112	3999
2	151	1532	2	224	1000
3	227	681	3	335	444
3000K 40°			3000K 60°		



cambio sin previo aviso change without notice

# Trim 75 24W

EM274  
empotrado recessed

2329Lm~2703Lm / 2700K~4000K  
IP20 IP40 / CRI ≥ 90 / 17° 24° 40° 60°

HER  
Light Lovers.



## GENERAL

negro black blanco white  
customizable custom

empotrado recessed

IP20 IP40 (acces. FL055/FL060)

ángulo de inclinación +30° -30°

tilting angle: +30° -30°

IK07

## APARATO DE ILUMINACIÓN LIGHTING FIXTURE

17° 24° 40° 60°

IRC ≥ 90 CRI ≥ 90

IP20 IP40 (acces. FL055/FL060)

MacAdam ≤ 3

UGR N/A

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 16,4W

power values of the system (LED + driver): 16,4W

## ACCESORIOS ACCESSORIES

FL025 Filtro escultura 25°-37°

FL060 sculpture filter 25°-37°

FL030 Filtro escultura 21°-30°

FL060 sculpture filter 21°-30°

FL035 Panel de abeja

FL035 honeycomb diffuser

FL045 Cristal transparente

FL060 frosted glass

FL050 Cristal glaseado

FL050 transparent glass

## ELÉCTRICA ELECTRICAL

24W

220-240VAC 50/60Hz

equipo incluido

gear included

## MEDIDAS MEASURES

178mm x 118mm

altura: 140mm

height: 140mm

## REGULACIÓN DIMMING

on / off

corte de fase IGBT/TRIAC

phase-cut dimming IGBT/TRIAC

1-10V

pulsador

push

DALI

## RECORTE CUTOUT

120 x 120mm

min. espesor del techo: 13mm

min. ceiling thickness: 13mm

máx. espesor del techo: -

max. ceiling thickness: -

profundidad empotrada: 145mm

recessed depth: 145mm






## DESCRIPCIÓN DESCRIPTION

Gama trimless del modelo SLIM 75. De fácil acceso al módulo LED.

Trimless version of the SLIM 75 range with an easy access to the lamp.

## REFERENCIAS REFERENCES

Model	Color	Lumen	lm/W
EM274/27	2700K	2329Lm	97Lm/W
EM274/30	3000K	2511Lm	104,6Lm/W
EM274/40	4000K	2703Lm	112,6Lm/W

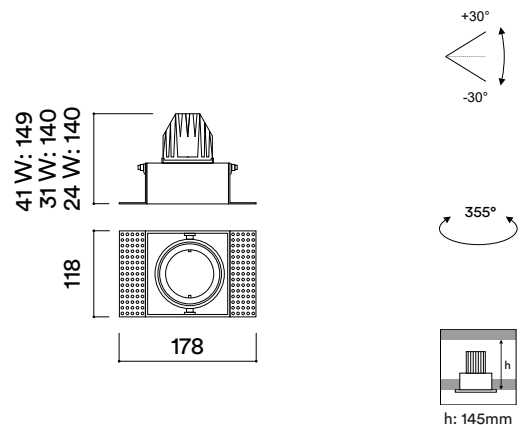

cambio sin previo aviso change without notice