

Straight XL Magnetic 12W

6208
carril tracklight

1080Lm~1318Lm / 2700K~4000K
IP20 / CRI ≥ 90 / 25° 43° 60°

HER
Light Lovers.



DESCRIPCIÓN DESCRIPTION

Versión de gran formato de la gama STRAIGHT MAGNETIC.

Big size version of the STRAIGHT MAGNETIC range.

REFERENCIAS REFERENCES

Model	Color Temperature	Lumen	Efficiency
6208/27	2700K	1080Lm	90Lm/W
6208/30	3000K	1217Lm	101,4Lm/W
6208/40	4000K	1318Lm	109,8Lm/W

GENERAL

negro black blanco white
customizable custom

carril tracklight

IP20

IK02

ELÉCTRICA ELECTRICAL

12W

48VDC 50/60Hz

equipo integrado

integrated gear

MEDIDAS MEASURES

Ø55mm x 150mm

REGULACIÓN DIMMING

on / off

pulsador

push

DALI

INSTALACIÓN INSTALLATION

magnetic track tar48

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

25° 43° 60°

IRC ≥ 90 CRI ≥ 90

IP20

MacAdam ≤ 3

UGR N/D

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 13,2W

power values of the system (LED + driver): 13,2W

ACCESORIOS ACCESSORIES

FL040 Panel de abeja


FL040 honeycomb diffuser

FL055 Cristal transparente

FL055 transparent glass

FL060 Cristal glaseado

FL060 frosted glass

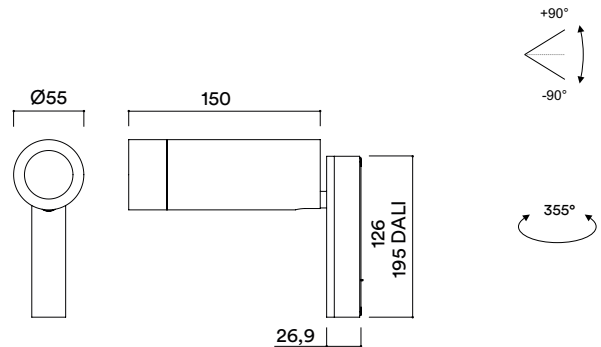

H(m)	D(cm)	Lux
1	45	4037
2	90	1009
3	135	449

3000K 25°

H(m)	D(cm)	Lux
1	69	2969
2	138	742
3	207	330

3000K 43°

H(m)	D(cm)	Lux
1	97	2090
2	193	523
3	290	232

3000K 60°



cambio sin previo aviso change without notice

Straight XL Magnetic 9W

6208
carril tracklight

683Lm~870Lm / 2700K~4000K
IP20 / CRI ≥ 90 / 20° 40° 60°

HER
Light Lovers.



GENERAL

negro black blanco white
customizable custom

carril tracklight

IP20

IK03

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

20° 40° 60°

IRC ≥ 90 CRI ≥ 90

IP20

MacAdam ≤ 3

UGR N/D

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 9,9W

power values of the system (LED + driver): 9,9W

ACCESORIOS ACCESSORIES

FL040 Panel de abeja

FL040 honeycomb diffuser

FL055 Cristal transparente

FL055 transparent glass

FL060 Cristal glaseado

FL060 frosted glass

ELÉCTRICA ELECTRICAL

9W

48VDC 50/60Hz

equipo integrado

integrated gear

MEDIDAS MEASURES

Ø55mm x 150mm

REGULACIÓN DIMMING

on / off

pulsador

push

DALI

INSTALACIÓN INSTALLATION

magnetic track tar48


DESCRIPCIÓN DESCRIPTION

Versión de gran formato de la gama STRAIGHT MAGNETIC.

Big size version of the STRAIGHT MAGNETIC range.

REFERENCIAS REFERENCES

Model	Color	Lumen	Efficiency
6208/27	2700K	683Lm	75,9Lm/W
6208/30	3000K	779Lm	86,6Lm/W
6208/40	4000K	870Lm	96,7Lm/W

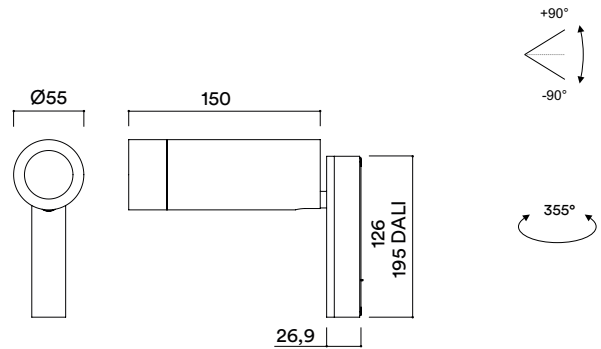

H(m)	D(cm)	Lux
1	41	2710
2	83	678
3	124	301

3000K 20°

H(m)	D(cm)	Lux
1	74	1403
2	147	351
3	221	156

3000K 40°

H(m)	D(cm)	Lux
1	121	939
2	242	235
3	363	104

3000K 60°



cambio sin previo aviso change without notice