

Straight Micro Su 4W

8200
suspensión suspension

350Lm / 2700K~3000K
IP20 / CRI ≥ 90 / 14° 39°

HER
Light Lovers.



DESCRIPCIÓN DESCRIPTION

Atractiva luminaria suspendida de diámetro reducido.

Suspended luminaire with a reduced diameter.

REFERENCIAS REFERENCES

8200/27	2700K	350Lm	87,5Lm/W
8200/30	3000K	350Lm	87,5Lm/W

GENERAL

negro black blanco white
customizable custom

suspensión suspension

IP20

IK07

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

14° 39°

IRC ≥ 90 CRI ≥ 90

IP20

MacAdam ≤ 3

UGR N/D

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 4,4W

power values of the system (LED + driver): 4,4W

ACCESORIOS ACCESSORIES

no disponible

not available

ELÉCTRICA ELECTRICAL

4W

220-240VAC 50/60Hz

equipo integrado

integrated gear

MEDIDAS MEASURES

Ø25mm

altura: 100~1000mm

height: 100~1000mm


REGULACIÓN DIMMING

on / off

INSTALACIÓN INSTALLATION

suspensión

suspension

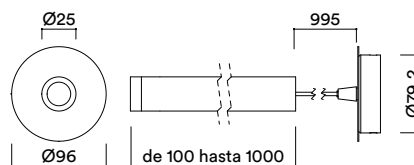

H(m)	D(cm)	Lux
1	30	3607
2	60	902
3	91	401

3000K 14°

H(m)	D(cm)	Lux
1	70	605
2	141	151
3	211	67

3000K 39°



cambio sin previo aviso change without notice